January 6, 2020



"Barbara" Model No. 1029


Customer Frameless Hardware Co. :			Order No.			B/L No.		
Sets		Width		Height Finish: Clear				
Fabricating Dept.								
Pieces	Stock No.	No.931 #10			Less for Cut	Net Siz	e Fa	b Shp
0	40	Hanger	Width		÷ 3 + .6875	0.6875	1	
0	1611	Shoe	" "		"	0.6875	1	
0	639	Pull	Height		- 1.6875	-1.6875		
No. 935 #11								
0	610	Top & Bottom	Width		÷ 3 + .6875	0.6875	,	
0	610	Upright	Height		1875	-0.1875	5	
0	1623	Channel	" "		1875	-0.1875	5	
Accessories								
0	7	Track w/101's	Width		Net Opening	0.0000	1	
0	606	Jamb w/101's	Height		- 1.3125	-1.3125	5	
0	637	Top & Bottom- 101's	Width #93	5	- 2.0000	-1.3125	5	
0	637	Jamb	Height #93	5	- 2.0000	-2.1875	5	
Shipping								
Pieces	Stock	Description	Pull	Ch	k These G	lass Sizes, Prov	en in our sh	op,
	No.							
0	679	Rollers			are subn	nitted as a servi	ice. We cann	.ot
0	658	Corners			Guarant	t ee or be held re	sponsible for	r its
0	662	Corners			accuracy	in all instances	s. Varying fa	ctors
0	122	Screws			make th	is impossible.		
0	781 ft.	1/4 in. Vinyl G	rey		s	luggested Glas	ss Sizes:	
0	35	Guides			0 pcs	-0.8125 x	-3.1875	(Sliding)
	812	Catch			0 pcs	-0.8125 x	-1.6875	(Fixed)
	Additional I	nformation			No.	10		-
114410001141 IIII01111411011			No	11	110.		No. 11	
			No. 11		Clerks	s side	110. 11	
			•					
						→ ì		$\uparrow \mid \; \mid$
Box & Mark:								
			#	11	#10	,	#11	
				ass	Glas	ll l	Glass	-0.1875
								4
			→					


"1029 BARBARA ASSEMBLY INSTRUCTIONS"


- 1. GLAZE GLASS PANELS.
- 2. ASSEMBLE FRAMES AROUND GLASS, USING MATCHING COLOR CODED DOTS.
- 3. MOUNT OVERHEAD TRACK IN OPENING. MOUNT BAR STOCK TO TOP, BOTTOM AND SIDES. SLIDE FIXED FRAMES INTO POSITION AND SECURE.
- 4. HANG SLIDING FRAME ON OVERHEAD TRACK BY TILTING AT A SLIGHT ANGLE.
- 5. PLACE SIDE JAMBS TO ALIGN WITH CORRESPONDING SLIDING FRAME, MARK THE RETRACTABLE GUIDE LOCATION ON COUNTER TOP ½ INCH "IN" FROM END OF THE FRAME.
- 6. REMOVE SLIDING FRAME.
- 7. WITH 5/16 INCH DRILL BIT, DRILL 1 INCH DEEP ON LOCATION & INSERT RETRACTABLE GUIDE.
- 8. RE-HANG SLIDING FRAME, SECURE BY PLACING OVER RETRACTABLE GUIDE.
- 9. MOUNT NO. 812 CATCH ON BASE AS SHOWN. THE LOCKING PIN CAN ALIGN WITH EDGE OF THE SLIDING FRAME OR DRILL A HOLE IN THE FRAME TO ACCOMMODATE THE LOCKING PIN. (optional)



★ All Mounting screws supplied by others

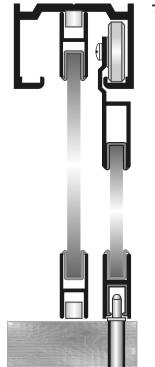



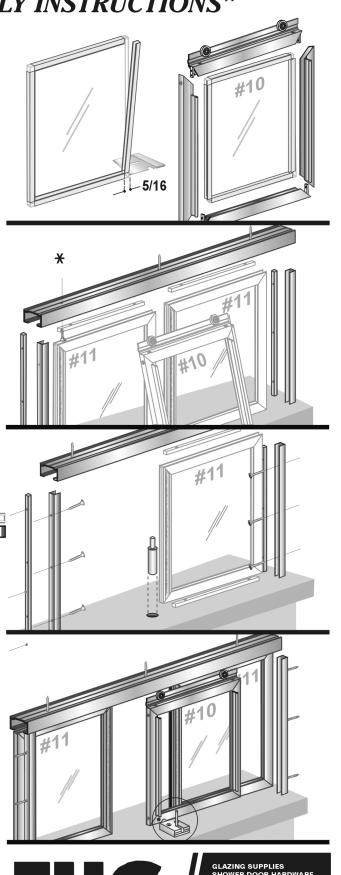

FRAMELESS HARDWARE COMPANY