FRAMELESS HARDWARE COMPANY
THE GLAZING SUPPLY COMPANY
EXPERIENCE AND INNOVATION

FHC P2 Series

Concealed Vertical Rod Panic Exit Device With Cylinder Dogging

Routing Installation Instructions

FHC P2 Series Routing Instructions

1. PREPARE INSIDE FACE (PANIC SIDE) OF ACTIVE STILE PER VIEW #1 & TEMPLATE 10–974.
2. PREPARE INSIDE FACE (PANIC SIDE) OF HINGE STILE PER VIEW #2 & TABLE "A".
3. PREPARE THRESHOLD PER VIEW #3.
4. PREPARE HEADER PER VIEW #4.
5. IF CYLINDER OR TRIM IS BEING USED, SEE DRILL TEMPLATE NO. 10–956 OR 10–987 WITH RIM AS APPROPRIATE.(REF. 10–1132 FOR OPT. PAD MOUNTING.)

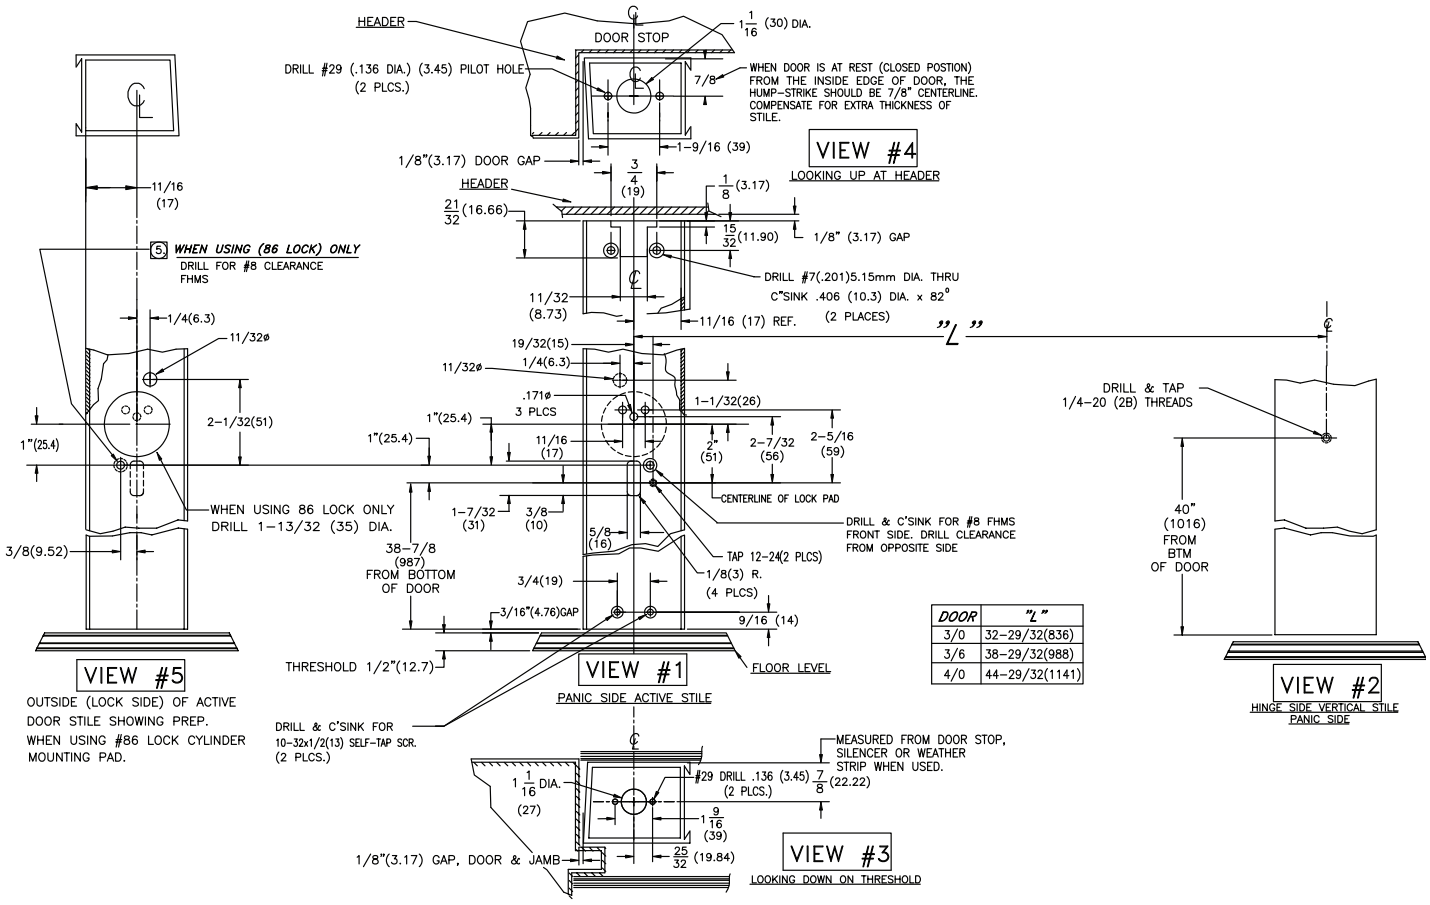

DOOR	"L"
3/0	32–29/32(836)
3/6	38–29/32(988)
4/0	44–29/32(1141)

FRAMELESS HARDWARE COMPANY
4361 Firestone Blvd. South Gate, CA 90280 Toll Free: **(888) 295-4531** | Fax: **323 336-8307** | Web: **fhc-usa.com**