

PATRIOT GRANDE

Pivot Glass-to-Glass Mount for 1/2" Glass
ITEM NO. PATGS02

SPECIFICATIONS

Glass Sizes: 1/2" (12mm) Tempered Glass Only
Construction: Solid Brass
Closing Type: Self-centering when within 15 Degrees of Closed Position
Includes: Hinge body, glazing gaskets, wall mounting screws, allen head/phillips head cover plate screws, and fabrication template.
Use: Residential Bath and Commercial Hotel Applications

GASKET SPECIFICATIONS:

For 1/2" Glass: Use One Thin Gasket on One Side and One Thick Gasket on the other side

For 12 mm Glass: One Thick Gasket Each Side

GLASS INSTRUCTIONS:



Only use tempered safety glass. To prevent damage to the hinge finish during installation, do not use power tools when installing these hinges.

OPTIONAL PIVOT PINS:

Optional 5° Pivot Pin P1VPN12 are sold as a set, one pin for the top hinge and one pin for the bottom hinge. These 5° offset pivot pins allow the installer to adjust the closing position of the door 5° inwards or outwards.

MAXIMUM DOOR CAPACITY	1/2" (12 mm) GLASS	
	WEIGHT	WIDTH
USING 2 HINGES	145 LBS. (66 kg)	36" (914 mm)

NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.

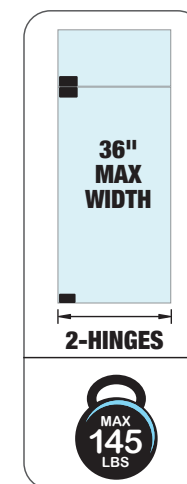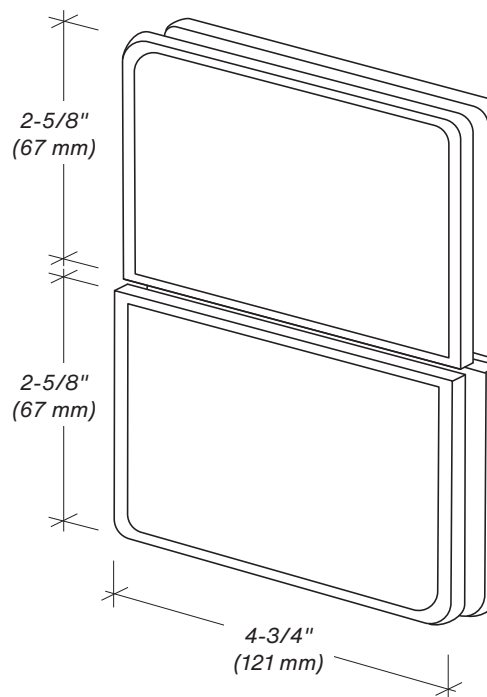

SEE TEMPLATE ON BACK
Refer to Dimensions Shown to Ensure Accuracy

CARE & CLEANING GUIDELINES:

For best results, keep the following recommendations in mind when caring for your FHC shower door hardware. Your shower door should be dried daily with a soft towel or cloth to ensure its original finish. Do not use harsh cleaners or chemicals on the hardware, as many of the components are coated with a clear lacquer that will become damaged beyond repair. Always test your cleaning solution in an inconspicuous area prior to cleaning the entire hardware surface. Wipe surfaces clean using a soft, dampened cloth or sponge, and rinse completely with warm water immediately after applying the cleaning solution. Use only small amounts of liquid, gentle, cleaner. Never use abrasive products, sponges, or wire scrub brushes while cleaning hardware.

MAINTENANCE:

FHC's hinges come factory greased for a silent, hassle-free experience. If there is any noticeable squeaking that occurs after installation it is recommended to apply a few drops of (3 in 1) multi-purpose oil to the hinge, at the nylon washer/pivot location. The lubricant will penetrate the hinge crevices, reducing friction, cleaning grime, and/or buildup. Spray lubricants are prohibited. If, for some reason, the hinge is disassembled during maintenance, use a small amount of white lithium grease to lubricate the interior hinge components.

FHC
FRAMELESS HARDWARE COMPANY
THE GLAZING SUPPLY COMPANY

PATRIOT GRANDE

Pivot Glass-to-Glass Mount for 1/2" Glass


ITEM NO. PATGS02

EDGE PIVOT PREFERRED OPTION

DO NOT MEASURE / SCALE DRAWING
USE DIMENSIONS SHOWN



Cutout No. SD15

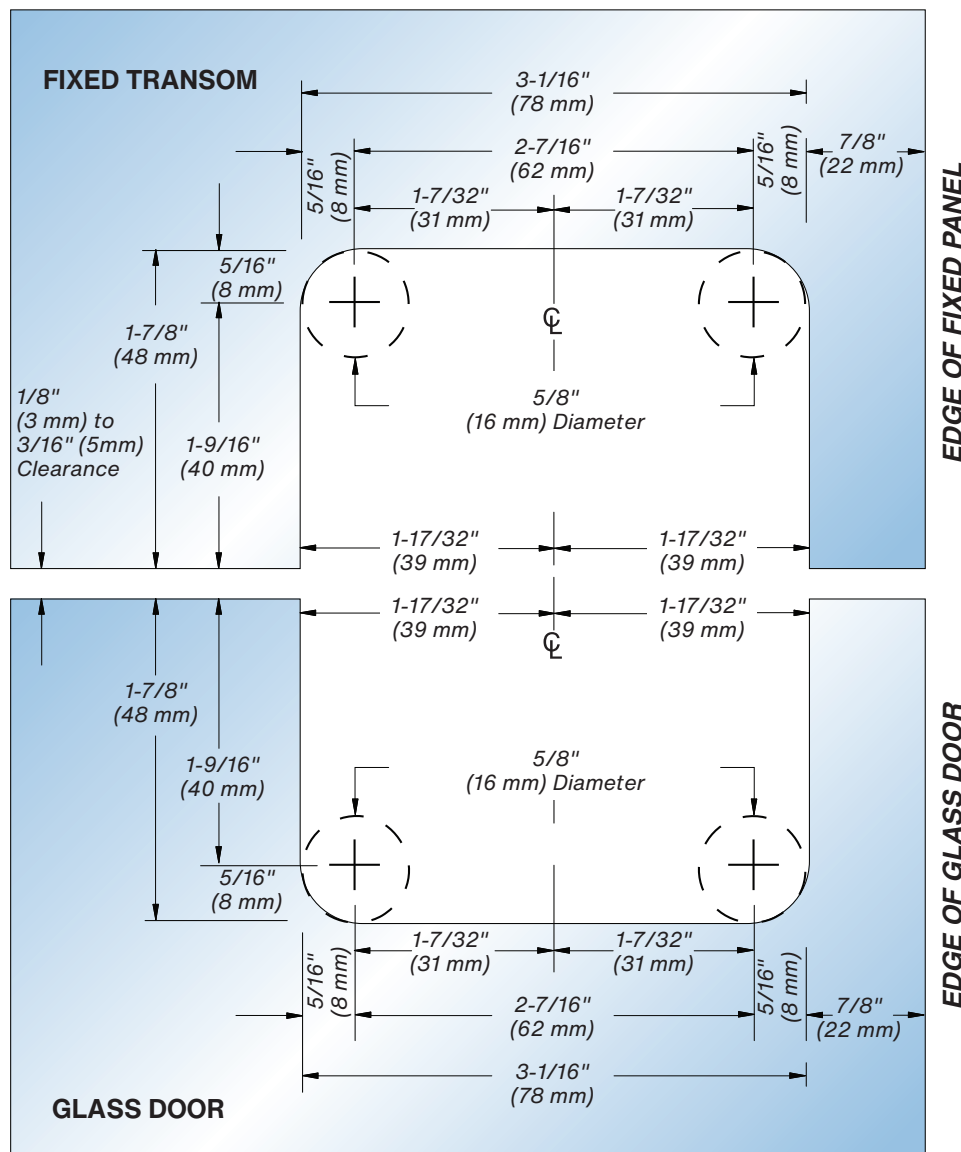

IMPORTANT:
Measure from Finished
Edge of Glass



**USE ONLY
MONOLITHIC
TEMPERED GLASS**



For Technical Support
Call Toll Free in the U.S.
(888) 295-4531

FHC

FRAMELESS HARDWARE COMPANY
THE GLAZING SUPPLY COMPANY