

FHC PANIC DEVICE ORDER FORM

CUSTOMER INFORMATION

CONTACT NAME _____ DATE _____
 COMPANY NAME _____ PO # _____
 STREET ADDRESS _____ PHONE _____
 CITY _____ STATE _____ ZIP _____ FAX _____
 ARCHITECT NAME _____ EMAIL _____
 JOB NAME _____

PANIC HOUSING

HP100 SERIES

SPECIFY HANDING
(Check Both for Pairs)

4 (LHR) 3 (RHR)

EXTERIOR HANDLE

A B D F F-S
 G H J J-S
 M M-S X Z


PAIR OF DOORS _____ MARK # _____

SINGLE DOOR(S) _____

SWING 3 (RHR) _____ MARK # _____
 SWING 4 (RHR) _____ MARK # _____

DUMMY HOUSING

HPD100 SERIES



GLASS THICKNESS

1/2" 5/8" 3/4" OTHER _____


TOP RAIL DESCRIPTION

FHC LOW PROFILE
 2-1/2" TAPERED RAIL
 2-1/2" SQUARE RAIL
 FHC STANDARD PROFILE
 4" TAPERED RAIL
 4" SQUARE RAIL

BOTTOM RAIL DESCRIPTION

FHC LOW PROFILE
 2-1/2" TAPERED RAIL
 2-1/2" SQUARE RAIL
 FHC STANDARD PROFILE
 4" TAPERED RAIL
 4" SQUARE RAIL
 10" SQUARE RAIL

DOOR TYPE (Check One)

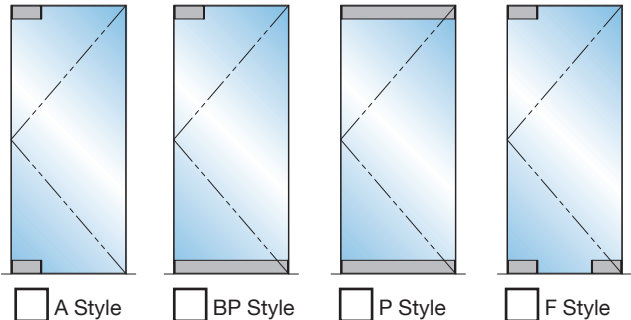

FHC LOW PROFILE PATCH
 2-1/2" TAPERED RAIL
 2-1/2" SQUARE RAIL

FHC LOW PROFILE PATCH
 2-1/2" TAPERED RAIL
 2-1/2" SQUARE RAIL

FHC PATCH PROFILE
 4" TAPERED RAIL
 4" SQUARE RAIL

FHC PATCH PROFILE
 4" TAPERED RAIL
 4" SQUARE RAIL

NORTH AMERICAN PATCH
 PF201 TOP PATCH

NORTH AMERICAN PATCH
 PF201 BOTTOM PATCH

RAIL THICKNESS _____
(If Not Supplied by FHC)

RAIL HEIGHT _____
(If Not Supplied by FHC)

DISTANCE BETWEEN CENTERLINE OF CRASH BAR TO BOTTOM OF DOOR

36" A.D.A Keyed Cylinder Compliant Height
 42" N.F.P.A 15 lb. 101 Compliant Height
 OTHER _____

IMPORTANT INFORMATION

JAMB CONDITION (Pivot Side Door)
 Required If Jamb Conditions is Frame or Wall

SIDELITES WALL
 FRAME (Specify Width) _____
 PIVOT DISTANCE INCREASED TO 3-1/2"
Note: When Adjacent Wall at 90 Degree.
 For A.D.A Requirement, Minimum 37" Door Opening Required.

FHC TO DECREASE HORIZONTAL DIMENSION
Note: When Jamb is Wider Than 4".

NET DOOR SIZE

WIDTH _____ HEIGHT _____

STRIKE OPTIONS (Check All That Applies)

MANUAL ELECTRIC Fail Safe or Fail Secure
 12V or 24V
 AC or DC

FINISHES (For Both Panic Device and Exterior Pull)

BRUSHED STAINLESS POLISHED STAINLESS
 MATTE BLACK (Powder Coat) POWDER COAT FINISH (Specify) _____

STRIKE FINISHES OPTIONS

BRUSHED STAINLESS POLISHED STAINLESS
 MATTE BLACK (Powder Coat) POWDER COAT FINISH (Specify) _____
 OTHER _____

FHC RECOMMENDS THAT DOOR HEIGHT BE LIMITED TO:

1/2" (12 mm) and 9/16" (13.52 mm)

5/8" (16 mm), 3/4" (19 mm) and 13/16" (21.52 mm)

Exterior Opening: 8'-0" (2.44 m)

Exterior Opening: 8'-6" (2.59 m)

Interior Opening: 8'-6" (2.59 m)

Interior Opening: 9'-0" (2.74 m)




Doors exceeding these recommendations above, the designer should take into account the following factors:

- Volume of Daily Usage (Number of Anticipated Cycles)
- Deflection of Door Due to Wind and/or Stack Load Pressures
- Stability of Door Under Operation (How Much the Door Flexes When Pushed)



For assistance in design applications, please contact our Technical Sales at Toll Free **(888) 295-4531**.

Operating Handles on Interior Side of Door

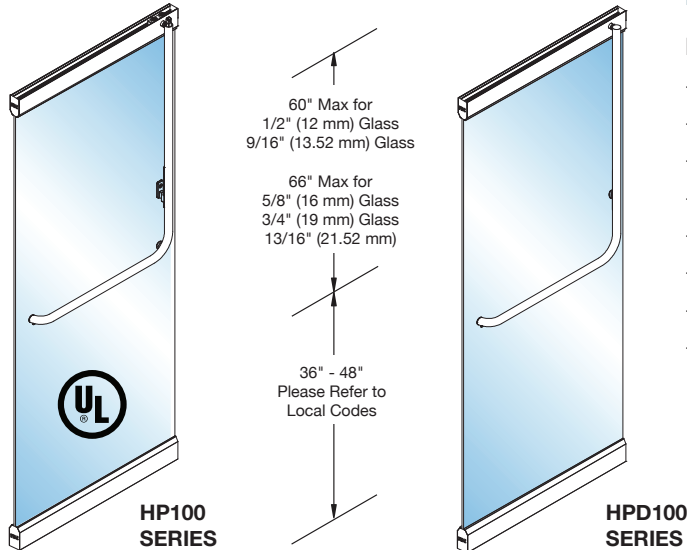


FHC INTERIOR DOOR HANDLES

Panic and Dummy handles

- For 1/2" (12 mm), 5/8" (16 mm) or 3/4" (19 mm) Tempered Glass
- For 9/16" (13.52 mm) or 13/16" (21.52 mm) Tempered Laminated Glass
- Can Be Used as Replacement for Older Panics
- Custom Sizes of Stock Finishes Ship Within Five to Seven Business Days
- Optional Keyed Access
- Optional Electric Strike
- Optional Exterior Fixed Handles
- Available in Polished or Brushed Stainless Steel, Matte Black and Power Coat Finish

FHC EXTERIOR PUSH/PULL HANDLE COMBINATIONS FOR PANIC AND DUMMY HANDLES

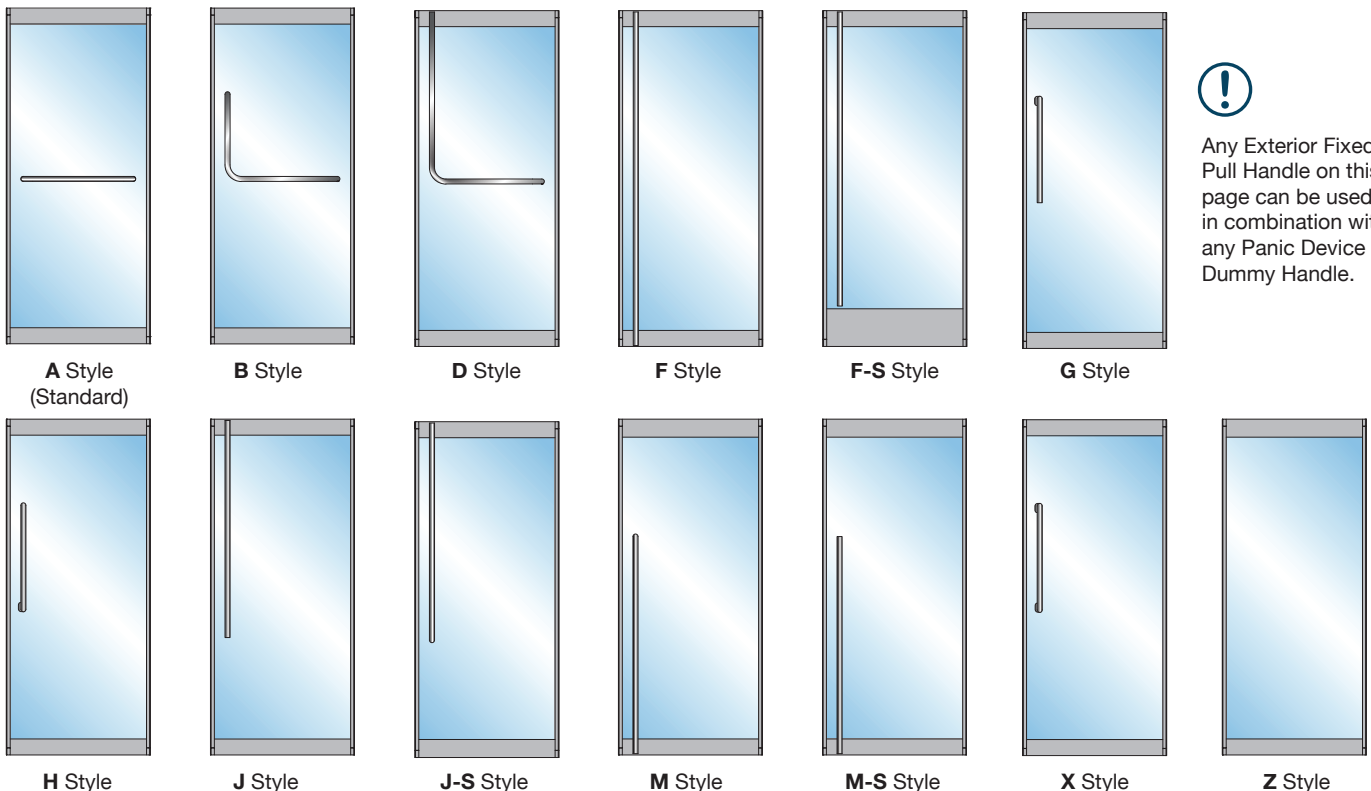

Any Exterior Fixed Pull Handle on this page can be used in combination with any Panic Device or Dummy Handle.