




The Glazing Supply Company
EXPERIENCE AND INNOVATION

SM80 PUSH SIDE JAMB MOUNTED

SELECT THE PICTURE THAT MATCHES YOUR INSTALLATION AND FOLLOW DIRECTIONS ON THAT SIDE OF PAGE.





Left Hand



CAUTION

IMPROPER INSTALLATION OR
REGULATION MAY RESULT IN
PERSONAL INJURY OR
PROPERTY DAMAGE. FOLLOW ALL
INSTRUCTIONS CAREFULLY.



Right Hand





1 LOCATE PULL SIDE TEMPLATES
& SEPARATE ON DOTTED LINE. 1

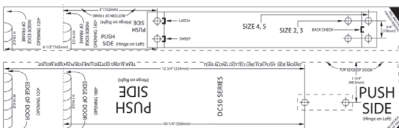




2 PEEL OFF TEMPLATES AND ALIGN WITH HINGE EDGE
OF DOOR & FRAME, CENTER PUNCH TEMPLATE HOLES. 2

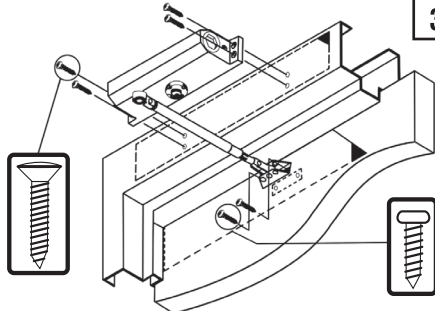


3 PEEL TEMPLATES OFF OF DOOR & FRAME.
ATTACH MOUNTING BODY, ROD & SHOE. 3

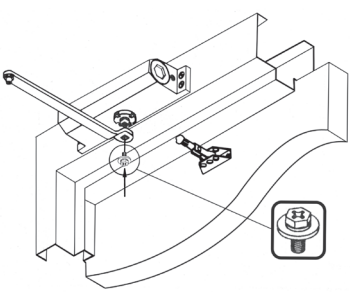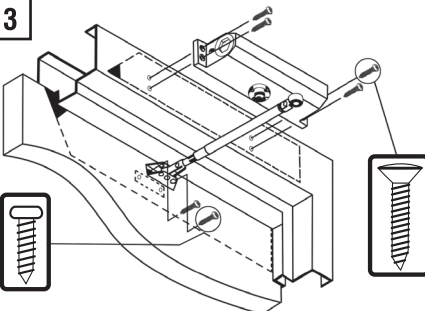

4 ATTACH MAIN ARM TO CLOSER. CONNECT ARM WITH
ROD & SHOE. PRELOAD ARM TO 90° AS SHOWN. 4




IF NECESSARY, ADJUST DOOR SPEEDS.

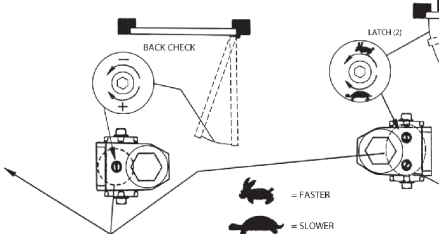


CAUTION

DO NOT TURN ADJUSTING VALVES MORE
THAN 2 FULL TURNS COUNTER-CLOCKWISE
FROM THE FACTORY SET POSITIONS.

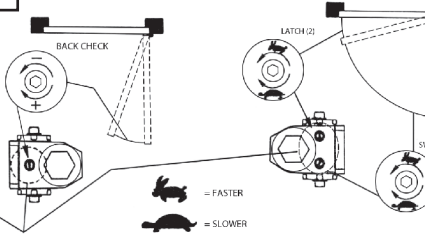


TOP JAMB LEFT HAND DOOR
PUSH SIDE



ATTACH FULL COVER & IF NECESSARY, ADJUST SPRING POWER.

TOP JAMB RIGHT HAND DOOR
PUSH SIDE




DOOR CLOSER SIZE		CLOCKWISE TURNS OF ADJUSTING VALVE		APPLICABLE DOOR SIZE		APPLICABLE DOOR WEIGHT
SM82 (SIZE 1-4)	SM80 (SIZE 2-5)	SM82 (SIZE 1-4)	SM80 (SIZE 2-5)	INTERIOR	EXTERIOR (SWING OUT)	
1	Not Recommended	0 (FACTORY SET)	Not Recommended	32" (0.81 m)	28" (0.71 m)	33-66 Lbs. (15-30 kg)
2	2	4 (FACTORY SET)	0	36" (0.91 m)	32" (0.81 m)	66-99 Lbs. (30-45 kg)
3	3	8	4	42" (1.07 m)	36" (0.91 m)	99-143 Lbs. (45-65 kg)
4	4	13	8	48" (1.22 m)	42" (1.07 m)	143-187 Lbs. (65-85 kg)
Not Recommended	5	Not Recommended	13	54" (1.37 m)	48" (1.22 m)	187-264 Lbs. (85-120 kg)



The Glazing Supply Company
EXPERIENCE AND INNOVATION

SM80 PULL SIDE DOOR MOUNTED

SELECT THE PICTURE THAT MATCHES YOUR INSTALLATION AND FOLLOW DIRECTIONS ON THAT SIDE OF PAGE.





Right Hand



CAUTION

IMPROPER INSTALLATION OR
REGULATION MAY RESULT IN
PERSONAL INJURY OR
PROPERTY DAMAGE. FOLLOW ALL
INSTRUCTIONS CAREFULLY.



Left Hand

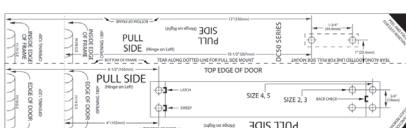



1 LOCATE PULL SIDE TEMPLATES
& SEPARATE ON DOTTED LINE. 1

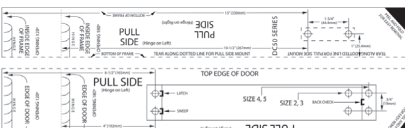




2 PEEL OFF TEMPLATES AND ALIGN WITH HINGE EDGE
OF DOOR & FRAME, CENTER PUNCH TEMPLATE HOLES. 2

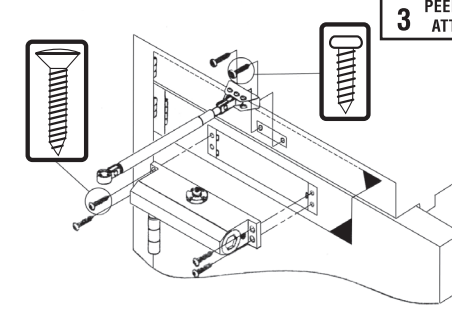


3 PEEL TEMPLATES OFF OF DOOR & FRAME.
ATTACH MOUNTING BODY, ROD & SHOE. 3

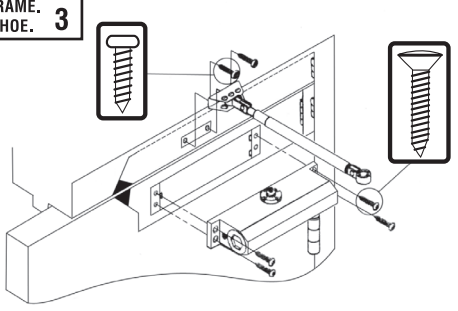

4 ATTACH MAIN ARM TO CLOSER. CONNECT ARM WITH
ROD & SHOE. PRELOAD ARM TO 90° AS SHOWN. 4




IF NECESSARY, ADJUST DOOR SPEEDS.

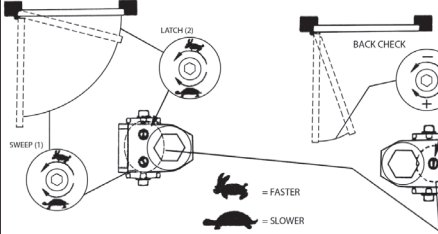


CAUTION

DO NOT TURN ADJUSTING VALVES MORE
THAN 2 FULL TURNS COUNTER-CLOCKWISE
FROM THE FACTORY SET POSITIONS.

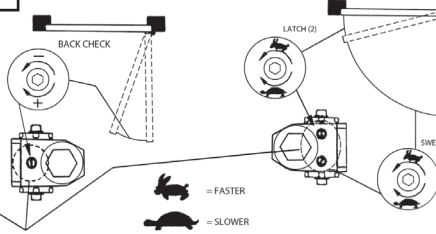


STANDARD RIGHT HAND DOOR
PULL SIDE



ATTACH FULL COVER & IF NECESSARY, ADJUST SPRING POWER.

STANDARD LEFT HAND DOOR
PULL SIDE



DOOR CLOSER SIZE		CLOCKWISE TURNS OF ADJUSTING VALVE		APPLICABLE DOOR SIZE		APPLICABLE DOOR WEIGHT
SM82 (SIZE 1-4)	SM80 (SIZE 2-5)	SM82 (SIZE 1-4)	SM80 (SIZE 2-5)	INTERIOR	EXTERIOR (SWING OUT)	
1	Not Recommended	0 (FACTORY SET)	Not Recommended	32" (0.81 m)	28" (0.71 m)	33-66 Lbs. (15-30 kg)
2	2	4 (FACTORY SET)	0	36" (0.91 m)	32" (0.81 m)	66-99 Lbs. (30-45 kg)
3	3	8	4	42" (1.07 m)	36" (0.91 m)	99-143 Lbs. (45-65 kg)
4	4	13	8	48" (1.22 m)	42" (1.07 m)	143-187 Lbs. (65-85 kg)
Not Recommended	5	Not Recommended	13	54" (1.37 m)	48" (1.22 m)	187-264 Lbs. (85-120 kg)